


Raychem RTD-MTO

RESISTANCE TEMPERATURE DETECTOR (RTD)

For temperature measurement up to 1100°F (593°C)

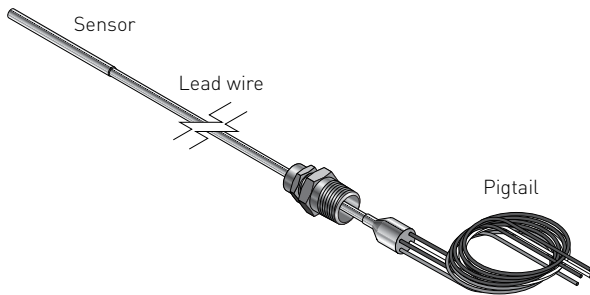

PRODUCT OVERVIEW

These three-wire platinum RTD's (resistance temperature detectors) are designed to withstand highly corrosive applications and are typically used with control and monitoring systems when accurate temperature control is required. The Alloy 825 sheathed lead wire is rugged, yet flexible, allowing the sensor to get around obstructions or into areas where a rigid conduit is not practical.

SPECIFICATIONS

Sensor

Housing	304 stainless steel
Nominal dimensions	3 in (76 mm) length, 1/4 in (6.4 mm) diameter
Accuracy	±1°F (0.5°C) at 32°F (0°C)
Range	-76°F to 1100°F (-60°C to 593°C)
Resistance	100 ohms at 0°C $\alpha = 0.00385$ ohms/ohm/°C

Lead Wire

Outer sheath	Alloy 825 stainless steel - 3/16 in (4.8 mm) in diameter
Length*	RTD10 - 10.2 ft (3.1 M) RTD20 - 20.2 ft (6.1 M)

Note: RTDs are available in lengths of 1, 3, 7, 15, 25, 30, 50, 75, and 100 ft. Contact Pentair Industrial Heat Tracing Solutions for additional information.

Maximum exposure temperature	1100°F (593°C)
Conduit connector	1/2" NPT, 303 MX stainless steel

Pigtail

Length*	24 in (61 cm)
Pigtail wire size (each of 4)	16 AWG, stranded tinned copper

Note: The length of RTD extension wires is determined by the wire gauge used. To reduce the likelihood that electrical noise will affect temperature measurement, keep RTD extension wires as short as possible. Use shielded instrument cable such as Raychem MONI-RTD-WIRE (22 AWG, PVC insulation, -30°F to 140°F, -20°C to 60°C) or Belden 83553 (22 AWG, FEP insulation, -95°F to 395°F, -70°C to 200°C).

Electrical Connection	For connection only to Class 2 circuits
-----------------------	---

* Tolerance on length is ±3%.

ADDITIONAL MATERIALS REQUIRED

Pipe straps

APPROVALS

Hazardous Locations



Class I, Div. 1 & 2, Groups A, B, C, D
Class II, Div. 1 & 2, Groups E, F, G
Class III

The RTD10 and RTD20 are approved for Division 1 and 2 only when used with the appropriately rated enclosure suitable for the specific hazardous location.



WWW.PENTAIRTHERMAL.COM

NORTH AMERICA

Tel: +1.800.545.6258
Fax: +1.800.527.5703
Tel: +1.650.216.1526
Fax: +1.650.474.7711
thermal.info@pentair.com

EUROPE, MIDDLE EAST, AFRICA

Tel: +32.16.213.511
Fax: +32.16.213.603
thermal.info@pentair.com

ASIA PACIFIC

Tel: +86.21.2412.1688
Fax: +86.21.5426.2937
cn.thermal.info@pentair.com

LATIN AMERICA

Tel: +1.713.868.4800
Fax: +1.713.868.2333
thermal.info@pentair.com

Pentair is owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 2003–2016 Pentair.